

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
27 January 2005 (27.01.2005)

PCT

(10) International Publication Number
WO 2005/007542 A1

(51) International Patent Classification?: **B65G 17/20**,
35/06, B61B 10/02 // 3/00, 13/04, B65G 21/20

(74) Agent: AWAPATENT AB; P.O. Box 11394, S-404 28
Stockholm (SE).

(21) International Application Number:
PCT/SE2004/001074

(22) International Filing Date: 2 July 2004 (02.07.2004)

(25) Filing Language: Swedish

(26) Publication Language: English

(30) Priority Data:
0302113-6 22 July 2003 (22.07.2003) SE
0400176-4 30 January 2004 (30.01.2004) SE

(71) Applicant (for all designated States except US): **OCS
OVERHEAD CONVEYOR SYSTEM AB** [SE/SE];
Företagsgatan 7-9, S-504 94 Borås (SE).

(72) Inventor; and


(75) Inventor/Applicant (for US only): **CHRISTIANSSON,
Carsten** [SE/SE]; Sörmarksgatan 133, S-502 52 Borås
(SE).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,
ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI,
SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: OVERHEAD CONVEYOR

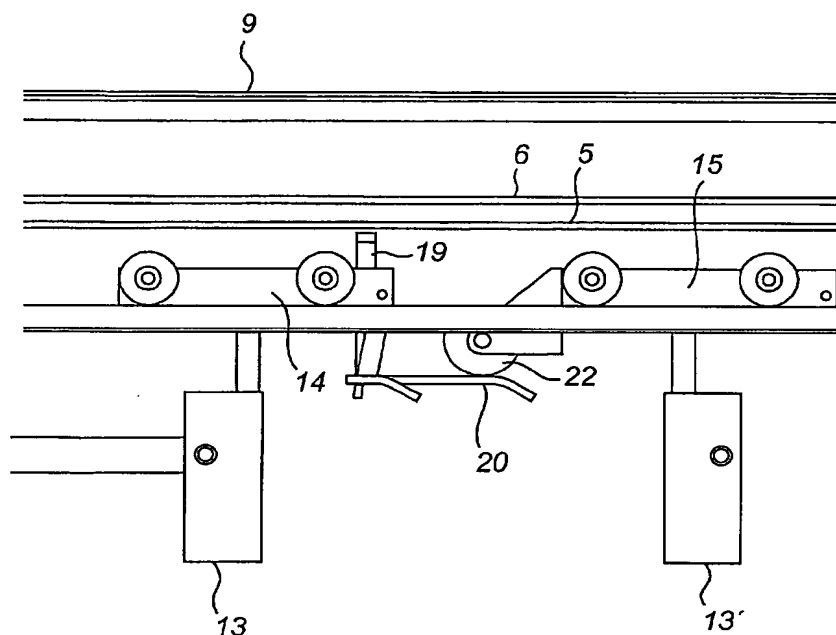

(57) Abstract: The invention relates to an overhead conveyor of the type that comprises at least one drive carriage (13) which is drivably arranged in a girder system and from which load-holding means (18) are suspended, and where the girder system comprises an elongate straight box girder (9) having a first inner space with rails (12) for the drive carriage (13) and a second elongate inner space comprising a driven endless belt (5, 6) with means (23) to be drivably connected to the drive carriage (13).

WO 2005/007542 A1



Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.